



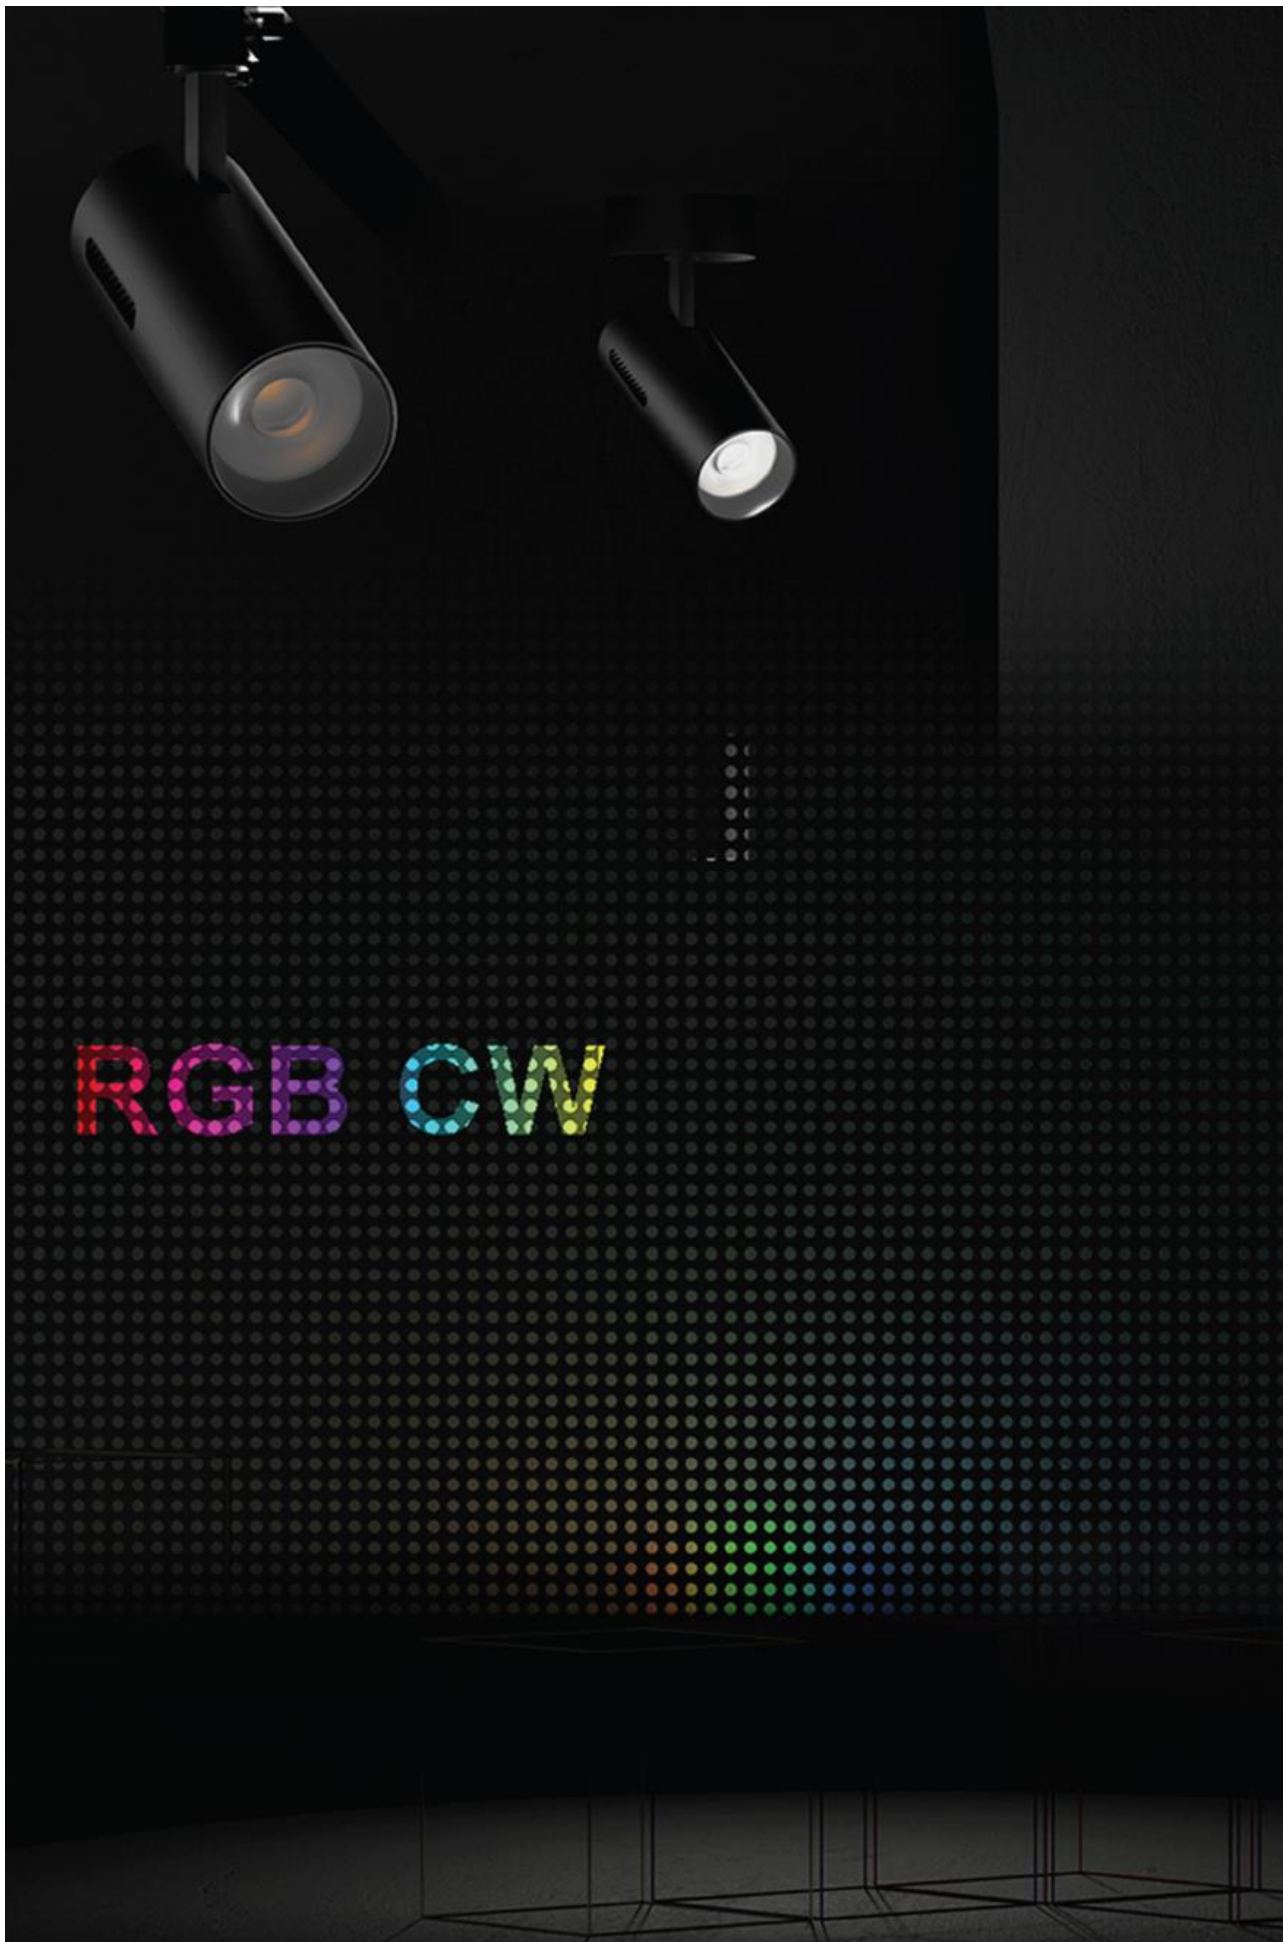




DLFCR80-RGBCW
Ø78.8x250mm

15W

CRI	Beam Angle	Luminous	CCT
≥90	38°	88lm	R
		150lm	G
		40lm	B
		885lm	6000K
		632lm	2700K

20W

CRI	Beam Angle	Luminous	CCT
≥90	38°	88lm	R
		150lm	G
		40lm	B
		1152lm	6000K
		842lm	2700K



Smart Life

ZigBee



To be used through APP available on Apple Store and Play Store for IOS and Android.

Utilizzabile tramite APP disponibile su Apple Store e Play Store per sistemi IOS e Android.

Track System: 3 Wires, 4 Wires
Material: Aluminium
Input Voltage(v): 220V-240V
Dimming: On/Off, Tuya, Zigbee
Light source: COB
luminaita Lifetime: 50,000h
Rotation Angel(degree): 355°
Tilting Angle(degree): 90°
IP Rating: 20
Operating Temp. (°C): -20 ~+40
Storage Temp. (°C): -20 ~+65
Color: Black/White
Driver: Built-in driver

Product image	Product Code	Power	LED Chip	Description	Product Dimension (mm)	IP	Input Voltage	Beam Angle	CRI	CCT	Operating Temperature	Driver	Pack	Warranty (year)
	80 373 (white finish) 80 374 (black finish)	10W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ 3 phases 4 wires track adapter ■ Track Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 375 (white finish) 80 376 (black finish)	15W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ 3 phases 4 wires track adapter ■ Track Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 377 (white finish) 80 378 (black finish)	20W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ 3 phases 4 wires track adapter ■ Track Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 535 (white finish) 80 536 (black finish)	10W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Recessed Downlight Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 537 (white finish) 80 538 (black finish)	15W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Recessed Downlight Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 539 (white finish) 80 540 (black finish)	20W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Recessed Downlight Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 541 (white finish) 80 542 (black finish)	10W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Surface Mounted Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 543 (white finish) 80 544 (black finish)	15W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Surface Mounted Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 545 (white finish) 80 546 (black finish)	20W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Surface Mounted Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 547 (white finish) 80 548 (black finish)	10W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Suspension Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 549 (white finish) 80 550 (black finish)	15W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Suspension Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3
	80 551 (white finish) 80 552 (black finish)	20W	COB-Bridgelux	■ RGB+C(6000K)+W(2700K) dynamic ■ Suspension Installation	Ø85*250	20	AC220-240V 50/60Hz	38°	90	RGBCW	-20°C~+40°C	RGBCW Tuya/SmartHome ZIGBEE Driver	12	3