



SELFBALLAST LED LAMPS FOR MAINS VOLTAGE


GLS HP **DECORLED**

9W A60	11W 15W A60	17W 20W A65																			
			<table border="1" style="margin: auto;"> <thead> <tr> <th>Model</th> <th>L (mm)</th> <th>D (mm)</th> </tr> </thead> <tbody> <tr> <td>9W</td> <td>108±4</td> <td>60±1</td> </tr> <tr> <td>11W</td> <td>115±4</td> <td>60±1</td> </tr> <tr> <td>15W</td> <td>123±4</td> <td>60±1</td> </tr> <tr> <td>17W</td> <td>134±2</td> <td>65±1</td> </tr> <tr> <td>20W</td> <td>134±2</td> <td>65±1</td> </tr> </tbody> </table>	Model	L (mm)	D (mm)	9W	108±4	60±1	11W	115±4	60±1	15W	123±4	60±1	17W	134±2	65±1	20W	134±2	65±1
Model	L (mm)	D (mm)																			
9W	108±4	60±1																			
11W	115±4	60±1																			
15W	123±4	60±1																			
17W	134±2	65±1																			
20W	134±2	65±1																			
																					


Code	P _{on} (W)	I (mA)	PF	φ _{tot} (lm)	lm/W	Energy Class	Ec (kWh/1000h)	Cap	T _c (K)	R _a
FLLS1040S	9	70	>0.5	800	88.9	A+	9	E27	2700	>80
FLLS1042S	9	70	>0.5	800	88.9	A+	9	E27	4000	>80
FLLS104ES	9	70	>0.5	830	92.2	A+	9	E27	6500	>80
FLLSD040S	11	90	>0.5	1050	95.5	A+	11	E27	2700	>80
FLLSD042S	11	90	>0.5	1050	95.5	A+	11	E27	4000	>80
FLLSD04ES	11	90	>0.5	1100	100	A+	11	E27	6500	>80
FLLS8040S	15	120	>0.5	1340	89.3	A+	15	E27	2700	>80
FLLS8042S	15	120	>0.5	1400	93.3	A+	15	E27	4000	>80
FLLS804ES	15	120	>0.5	1400	93.3	A+	15	E27	6500	>80
FLLSE040S	17	140	>0.5	1400	82.3	A+	17	E27	2700	>80
FLLSM040S	20	160	>0.5	2000	100	A+	20	E27	2700	>80
FLLSM042S	20	160	>0.5	2100	105	A+	20	E27	4000	>80
FLLSM04ES	20	160	>0.5	2100	105	A+	20	E27	6500	>80

LED lamp classified EXEMPT (RISK GROUP 0) in application of the EN 62471: 2008 (CIE S009:2002) standards "Photobiological safety of lamps and lamp systems" and in application of the European Directive 2006/25 on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).

Operating electric conditions	220 – 240V 50/60Hz
Not adjustable	
Lamp not suitable for use under moisture	
Useful lifetime	L70 B50 = 30.000 hours
Lamp Survival Factor @6000h	0.90
Lamp Lumen Maintenance Factor @6000h	0.80
Starting time	< 0.4s
Number of Switching cycles before failure	> 15.000
Warm-up time (to 95% of the steady-state lumen output)	< 2.0s
Failure rate @1000h	< 5.0%
Colour consistency	MacAdam ellipses step ≤ 6
Mercury and dangerous substances	Absent
UV and IR radiation	Absent

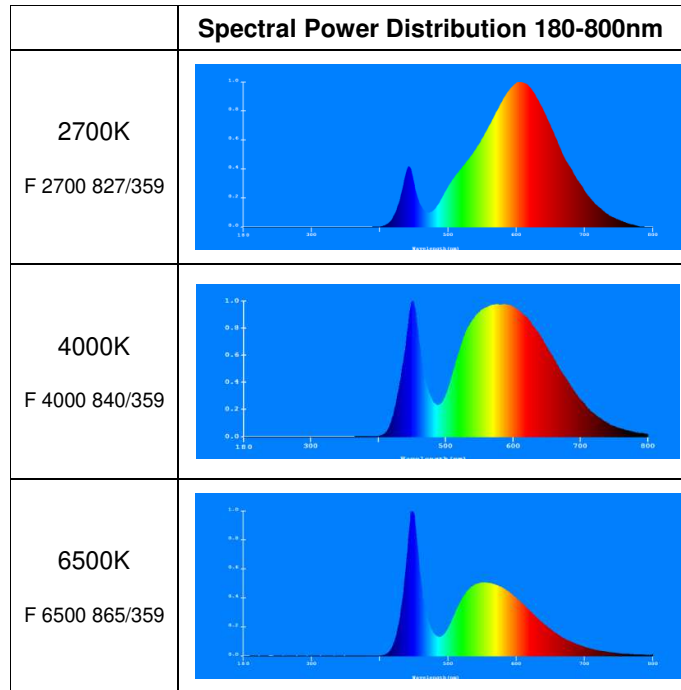

Reference Standards: EN62560; EN62612; EN62493; EN62471; EN55015; EN61000-3-2; EN61000-3-3; EN61547
 European Directives: 2014/35; 2014/30; 92/31; 93/68; 2009/125 (Reg.no.1194/2012; no.244/09; no.1428/2015); 2012/27 (Reg.Del. no.874/2012 and Reg. no.1369/2017); 2011/65; 2012/19

	<p>Correct disposal of this product (Waste Electrical & Electronic Equipment) Applicable in countries with separate collection systems</p> <p>This graphic symbol placed on the product and on the package indicates that the product should not be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and responsibly recycle them to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased the product, or their local government office, for details on where and how they can take these items for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract; this product should not be mixed with other commercial wastes for disposal.</p>
---	--