







SELFBALLAST LED LAMPS FOR MAINS VOLTAGE ELLIPSOID

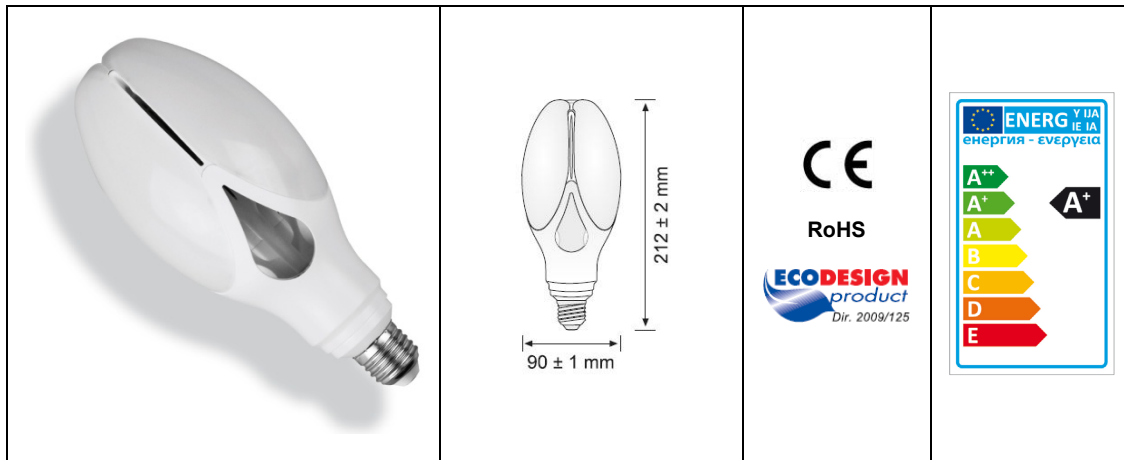


| Code | P _{nom} (W) | T _c (K) | Cap | I (mA) | PF | Luminous Flux (lm) | lm/W | Equivalent inc power (W) | Energy Class | E _c (kWh/1000h) | R _a | Weight (g) |
|-----------|-------------------------|-----------------------|-----|-----------|-------|--------------------------|-------|--------------------------------|-----------------|-------------------------------|----------------|---------------|
| FLLPP9JAP | 30 | 3000 | E27 | 140 | >0.90 | 2700 | 90 | 163 | A+ | 30 | ≥80 | 310 |
| FLLPP9JDP | 30 | 5000 | E27 | 140 | >0.90 | 2900 | 96.7 | 173 | A+ | 30 | ≥80 | 310 |
| FLLP09JAP | 40 | 3000 | E27 | 170 | >0.90 | 3700 | 92.5 | 213 | A+ | 40 | ≥80 | 320 |
| FLLP09JDP | 40 | 5000 | E27 | 170 | >0.90 | 4100 | 102.5 | 233 | A+ | 40 | ≥80 | 320 |


LED lamp classified RISK GROUP 1 in application of the EN62471: 2008 (CIE S009:2002) standards "Photobiological safety of lamps and lamp systems" and in application of the European Directive 2006/25 on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).

| | |
|--|---|
| Lamp suitable for substitution of the traditional HID mercury blended lamps working at 230V. | |
| Attention: Not for retrofit of any other discharge lamp wherever there is a ballast (or ignitor) in the circuit. | |
| Accessory adaptor E27 to E40 cap in the box |  |
| Operating electric conditions | 220 - 240V 50/60Hz |
| Not adjustable |  |
| Lamp not suitable for use under moisture |  |
| Average lifetime L70, F50 | 30W) 25.000 hours 40W) 20.000 hours |

| | |
|--|---|
| Lamp Survival Factor @6000h | 0.90 |
| Lamp Lumen Maintenance Factor @6000h | 0.80 |
| 30W) Lamp Lumen Maintenance Factor @25.000h 40W) Lamp Lumen Maintenance Factor @20.000h | 70% (L70) |
| Recommended ambient temperature |  |
| Positioning: vertical $\pm 45^\circ$ |  |
| Starting time | < 0.4s |
| Number of switching cycles before failure | > 15.000 |
| Warm-up time (to 95% of the steady-state luminous output) | < 2.0s |
| Failure rate @1000h | < 5.0% |
| Colour consistency | MacAdam ellipses step ≤ 6 |
| Mercury and dangerous substances | Absent |
| UV and IR radiation | Absent |

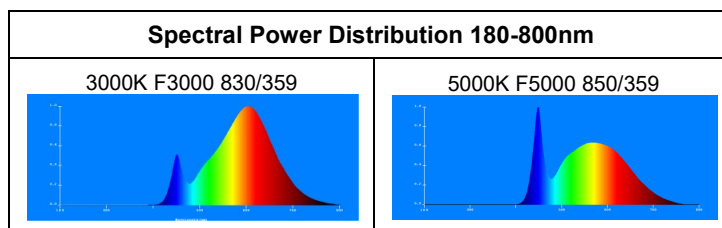

Reference Standards: EN62560; EN62612; EN62493; EN62471; IEC/TR62471-2; EN55015; EN61000-3-2; EN61000-3-3; EN61547
 European Directives: 2014/35; 2014/30; 92/31; 93/68; 2009/125 (Reg.no.1194/2012; no.244/09; no.1428/2015); 2012/27 (Reg.Del. no.874/2012 and Reg. no.1369/2017); 2011/65; 2012/19

| | |
|---|---|
|  | <p>Correct disposal of this product (Waste Electrical & Electronic Equipment) Applicable in countries with separate collection systems</p> <p>This graphic symbol placed on the product and on the package indicates that the product should not be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and responsibly recycle them to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased the product, or their local government office, for details on where and how they can take these items for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract; this product should not be mixed with other commercial wastes for disposal.</p> |
|---|---|