





SELFBALLAST LED LAMPS FOR MAINS VOLTAGE



GU10 6W “SNOW” **ECO BRIGHT**

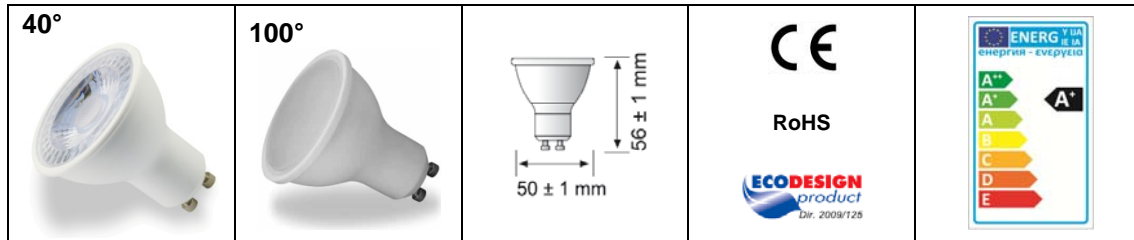

Item code	P _{nom} (W)	T _c (K)	Cap	I (mA)	PF	Total Flux (lm)	Useful Flux (lm)	lm/W	Equivalent hal PAR16 power (W)	Energy Class	Ec (kWh/1000h)	Axis Cd	Beam	R _a	Weight (g)
FLLN407AC	6	3000	GU10	45	≥0.5	480	390	65	56	A+	6	600	40°	≥80	38
FLLN4072C	6	4000	GU10	45	≥0.5	480	390	65	56	A+	6	600	40°	≥80	38
FLLN407EC	6	6500	GU10	45	≥0.5	510	410	68.3	59	A+	6	650	40°	≥80	38


Item code	P _{nom} (W)	T _c (K)	Cap	I (mA)	P F	Lumin. Flux (lm)	lm/W	Equiv. inc power (W)	En. Class	Ec (kWh/1000h)	Axis Cd	Beam	R _a	Weight (g)	
FLLN40CAC	6	3000	GU10	45	≥0.5	430	71.7	38	A+	6	140	100°	≥80	38	
FLLN40C2C	6	4000	GU10	45	≥0.5	430	71.7	38	A+	6	140	100°	≥80	38	
FLLN40CEC	6	6500	GU10	45	≥0.5	470	78.3	40	A+	6	160	100°	≥80	38	

LED lamp classified EXEMPT (RISK GROUP 0) in application of the EN 62471: 2008 (CIE S009:2002) standards "Photobiological safety of lamps and lamp systems" and in application of the European Directive 2006/25 on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).

40° model: PAR16 DIRECTIONAL LAMP – for accent lighting 100° model: NON DIRECTIONAL LAMP - for diffused lighting	
Operating electric conditions	220 - 240V 50/60Hz
Not adjustable	
Lamp not suitable for use under moisture	
Average lifetime L70, F50	20.000 hours
Lamp Survival Factor @6000h	0.90
Lamp Lumen Maintenance Factor @6000h	0.80
Lamp Lumen Maintenance Factor @20.000h	70% (L70)
Starting time	< 0.4s
Number of switching cycles before failure	> 15.000
Warm-up time (to 95% of the steady-state luminous output)	< 2.0s
Failure rate @1000h	< 5.0%
Colour consistency	MacAdam ellipses step ≤ 6
Mercury and dangerous substances	Absent
UV and IR radiation	Absent



	GONIOPHOTOMETRICS	LUMINANCE IN FRONT OF THE EMITTING SURFACE	UGR Table																												
40° 3000K 4000K			<table border="1"> <thead> <tr> <th colspan="2">Viewed cross-section</th> <th colspan="2">Viewed oblique</th> </tr> <tr> <th>Height</th> <th>Beam diameter</th> <th>Beam diameter</th> <th>Beam diameter</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>115 lx</td> <td>200 cm</td> <td></td> </tr> <tr> <td>2m</td> <td>28 lx</td> <td>400 cm</td> <td></td> </tr> <tr> <td>3m</td> <td>12 lx</td> <td>600 cm</td> <td></td> </tr> <tr> <td>4m</td> <td>7 lx</td> <td>800 cm</td> <td></td> </tr> <tr> <td>5m</td> <td>4 lx</td> <td>1000 cm</td> <td></td> </tr> </tbody> </table>	Viewed cross-section		Viewed oblique		Height	Beam diameter	Beam diameter	Beam diameter	1m	115 lx	200 cm		2m	28 lx	400 cm		3m	12 lx	600 cm		4m	7 lx	800 cm		5m	4 lx	1000 cm	
Viewed cross-section		Viewed oblique																													
Height	Beam diameter	Beam diameter	Beam diameter																												
1m	115 lx	200 cm																													
2m	28 lx	400 cm																													
3m	12 lx	600 cm																													
4m	7 lx	800 cm																													
5m	4 lx	1000 cm																													
40° 6500K			<table border="1"> <thead> <tr> <th colspan="2">Viewed cross-section</th> <th colspan="2">Viewed oblique</th> </tr> <tr> <th>Height</th> <th>Beam diameter</th> <th>Beam diameter</th> <th>Beam diameter</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>122 lx</td> <td>200 cm</td> <td></td> </tr> <tr> <td>2m</td> <td>30 lx</td> <td>400 cm</td> <td></td> </tr> <tr> <td>3m</td> <td>13 lx</td> <td>600 cm</td> <td></td> </tr> <tr> <td>4m</td> <td>7 lx</td> <td>800 cm</td> <td></td> </tr> <tr> <td>5m</td> <td>4 lx</td> <td>1000 cm</td> <td></td> </tr> </tbody> </table>	Viewed cross-section		Viewed oblique		Height	Beam diameter	Beam diameter	Beam diameter	1m	122 lx	200 cm		2m	30 lx	400 cm		3m	13 lx	600 cm		4m	7 lx	800 cm		5m	4 lx	1000 cm	
Viewed cross-section		Viewed oblique																													
Height	Beam diameter	Beam diameter	Beam diameter																												
1m	122 lx	200 cm																													
2m	30 lx	400 cm																													
3m	13 lx	600 cm																													
4m	7 lx	800 cm																													
5m	4 lx	1000 cm																													
100° 3000K 4000K			<table border="1"> <thead> <tr> <th colspan="2">Viewed cross-section</th> <th colspan="2">Viewed oblique</th> </tr> <tr> <th>Height</th> <th>Beam diameter</th> <th>Beam diameter</th> <th>Beam diameter</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>31 lx</td> <td>346 cm</td> <td></td> </tr> <tr> <td>2m</td> <td>7 lx</td> <td>692 cm</td> <td></td> </tr> <tr> <td>3m</td> <td>3 lx</td> <td>1039 cm</td> <td></td> </tr> <tr> <td>4m</td> <td>2 lx</td> <td>1385 cm</td> <td></td> </tr> <tr> <td>5m</td> <td>1 lx</td> <td>1732 cm</td> <td></td> </tr> </tbody> </table>	Viewed cross-section		Viewed oblique		Height	Beam diameter	Beam diameter	Beam diameter	1m	31 lx	346 cm		2m	7 lx	692 cm		3m	3 lx	1039 cm		4m	2 lx	1385 cm		5m	1 lx	1732 cm	
Viewed cross-section		Viewed oblique																													
Height	Beam diameter	Beam diameter	Beam diameter																												
1m	31 lx	346 cm																													
2m	7 lx	692 cm																													
3m	3 lx	1039 cm																													
4m	2 lx	1385 cm																													
5m	1 lx	1732 cm																													
100° 6500K			<table border="1"> <thead> <tr> <th colspan="2">Viewed cross-section</th> <th colspan="2">Viewed oblique</th> </tr> <tr> <th>Height</th> <th>Beam diameter</th> <th>Beam diameter</th> <th>Beam diameter</th> </tr> </thead> <tbody> <tr> <td>1m</td> <td>35 lx</td> <td>346 cm</td> <td></td> </tr> <tr> <td>2m</td> <td>8 lx</td> <td>692 cm</td> <td></td> </tr> <tr> <td>3m</td> <td>3 lx</td> <td>1039 cm</td> <td></td> </tr> <tr> <td>4m</td> <td>2 lx</td> <td>1385 cm</td> <td></td> </tr> <tr> <td>5m</td> <td>1 lx</td> <td>1732 cm</td> <td></td> </tr> </tbody> </table>	Viewed cross-section		Viewed oblique		Height	Beam diameter	Beam diameter	Beam diameter	1m	35 lx	346 cm		2m	8 lx	692 cm		3m	3 lx	1039 cm		4m	2 lx	1385 cm		5m	1 lx	1732 cm	
Viewed cross-section		Viewed oblique																													
Height	Beam diameter	Beam diameter	Beam diameter																												
1m	35 lx	346 cm																													
2m	8 lx	692 cm																													
3m	3 lx	1039 cm																													
4m	2 lx	1385 cm																													
5m	1 lx	1732 cm																													

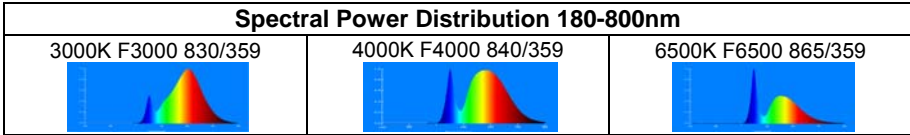

Reference Standards: EN62560; EN62612; EN62493; EN62471; IEC/TR62471-2; EN55015; EN61000-3-2; EN61000-3-3; EN61547
 European Directives: 2014/35; 2014/30; 92/31; 93/68; 2009/125 (Reg.no.1194/2012; no.244/09; no.1428/2015); 2012/27 (Reg.Del. no.874/2012 and Reg. no.1369/2017); 2011/65; 2012/19

Correct disposal of this product (Waste Electrical & Electronic Equipment) - Applicable in countries with separate collection systems. This graphic symbol placed on the product and on the package indicates that the product should not be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and responsibly recycle them to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased the product, or their local government office, for details on where and how they can take these items for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract; this product should not be mixed with other commercial wastes for disposal.

All parts of this document are ownership of DLU. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. DLU maintain the right to change the included data without notice due to improvements of the products.