





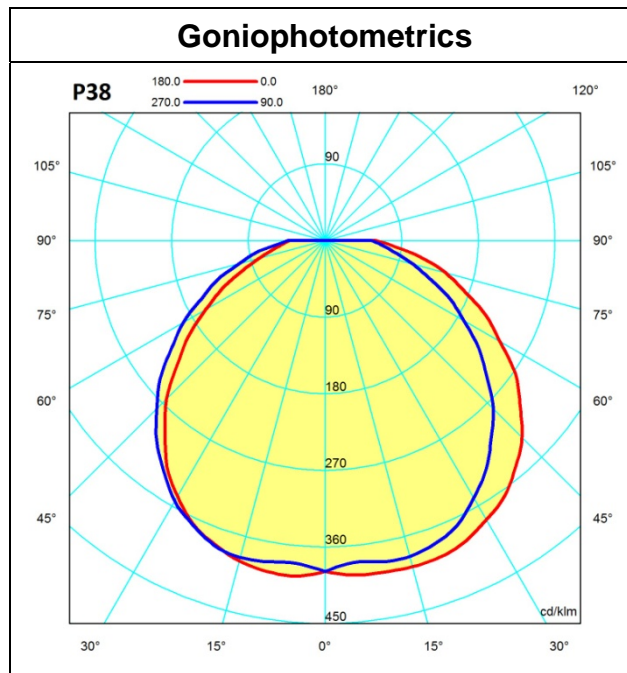
SELFBALLAST LED LAMPS FOR MAINS VOLTAGE PAR16 GU10 **OEM** **LED**



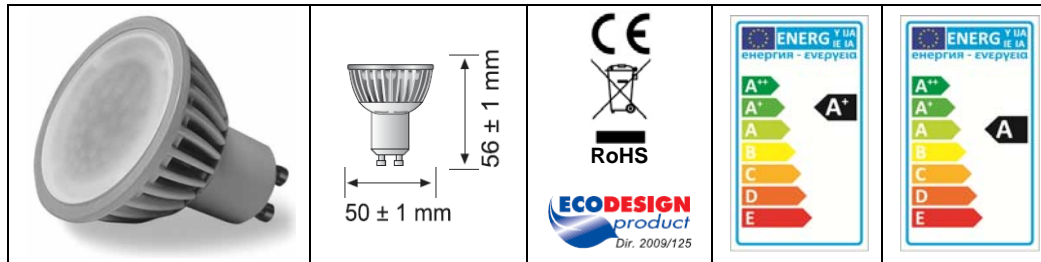


| Item code | P _{nom} (W) | T _c (K) | Cap | I (mA) | PF | Total Flux (lm) | Useful Flux (lm) | lm/W | Equivalent hal PAR16 power (W) | Energy Class | Ec (kWh/1000h) | Axis cd | Beam | Weight (g) |
|-------------|----------------------|--------------------|------|--------|------|-----------------|------------------|------|--------------------------------|--------------|----------------|---------|------|------------|
| FLLN20CAC-M | 4 | 3000 | GU10 | 40 | >0.4 | 270 | 190 | 47.5 | 31 | A | 4 | 105 | 110° | 48 |
| FLLN20CDC-M | 4 | 5000 | GU10 | 40 | >0.4 | 300 | 210 | 52.5 | 33 | A+ | 4 | 120 | 110° | 48 |
| FLLN20CEC-M | 4 | 6500 | GU10 | 40 | >0.4 | 320 | 230 | 57.5 | 35 | A+ | 4 | 130 | 110° | 48 |
| FLLN40CAC-M | 6 | 3000 | GU10 | 55 | >0.5 | 410 | 330 | 55 | 49 | A | 6 | 200 | 110° | 48 |
| FLLN40CDC-M | 6 | 5000 | GU10 | 55 | >0.5 | 420 | 350 | 58.3 | 51 | A+ | 6 | 210 | 110° | 48 |
| FLLN40CEC-M | 6 | 6500 | GU10 | 55 | >0.5 | 430 | 360 | 60 | 52 | A+ | 6 | 220 | 110° | 48 |


LED lamp classified EXEMPT (RISK GROUP 0) in application of the EN 62471: 2008 (CIE S009:2002) standards "Photobiological safety of lamps and lamp systems" and in application of the European Directive 2006/25 on the minimum health and safety requirements regarding the exposure of workers to risks arising from physical agents (artificial optical radiation).

| | |
|---|--|
| Operating electric conditions | 4W: 230 - 240V 50/60Hz 6W: 220 - 240V 50/60Hz |
| Not adjustable |  |
| Lamp not suitable for use under moisture |  |
| R _a | > 80 |
| Lamp not suitable for accent lighting |  |
| Average lifetime L70, F50 | 20.000 hours |
| Lamp Survival Factor @6000h | 0.90 |
| Lamp Lumen Maintenance Factor @6000h | 0.80 |
| Lamp Lumen Maintenance Factor @20.000h | 70% (L70) |
| Starting time | < 0.4s |
| Number of switching cycles before failure | > 10.000 |
| Warm-up time (to 95% of the steady-state luminous output) | < 2.0s |
| Failure rate @1000h | < 5.0% |
| Colour consistency | MacAdam ellipses step ≤ 6 |
| Mercury and dangerous substances | Absent |
| UV and IR radiation | Absent |

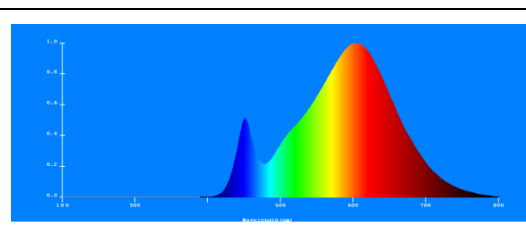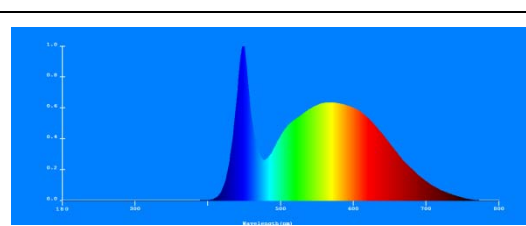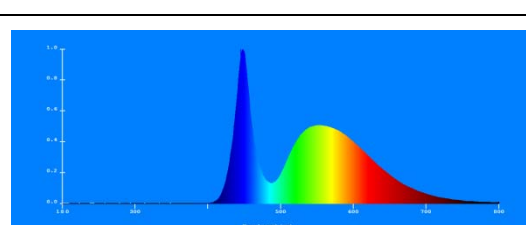

| Spectral Power Distribution 180-800nm | |
|--|--|
| 3000K F 3000 830/359 |  |
| 5000K F 5000 850/359 |  |
| 6500K F 6500 865/359 |  |

Reference Standards: EN62560; EN62612; EN62493; EN62471; EN55015; EN61000-3-2; EN61000-3-3; EN61547
 European Directives: 2014/35; 2014/30; 92/31; 93/68; 2009/125 (Reg.no.1194/2012; no.1428/2015); 2012/27 (Reg.Del. no.874/2012 and Reg. no.1369/2017); 2011/65; 2012/19

| | |
|---|---|
|  | <p>Correct disposal of this product (Waste Electrical & Electronic Equipment) Applicable in countries with separate collection systems This graphic symbol placed on the product and on the package indicates that the product should not be disposed with other household waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate these items from other types of waste and responsibly recycle them to promote the sustainable reuse of material resources. Household users should contact either the retailer where they purchased the product, or their local government office, for details on where and how they can take these items for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract; this product should not be mixed with other commercial wastes for disposal.</p> |
|---|---|